



RVs, Trolling Motor, Boat Electronics,
Solar Energy System, Home Storage



Length : 229mm/9.02 inch
Width : 144mm/5.67 inch

Height : 211.9mm/8.34 inch
Weight : 9.8kg±3%/21.61 lb±3%

Smart 6000+ Cycles Life IP65 Waterproof

ELECTRICAL PERFORMANCE

Nominal Voltage	12.8V
Nominal Capacity	100Ah
Energy	1280Wh
Months Self Discharge	≤3%/Month
Cycle Life	6000@DOD80%

CHARGE PERFORMANCE

Charge Mode	CC/CV
Charge Voltage	14.4V
Recommended Charge Current	20A
Max. Continuous Charge Current	100A
Charge Cut-Off Voltage	14.4V

MECHANICAL PERFORMANCE

Shell Type	ABS
Size	229x 144 x 211.9mm/ 9.02 x 5.67 x 8.34 inch
Weight	9.8kg±3%/21.61 lb±3%
Ingress Protection Rating	IP65
Terminal	M8

BMS SPECIFICATION

Overall Over-Charge Detection Voltage	14.6±0.08V
Overall Over-Discharge Detection Voltage	10±1V
1st Discharge Over-Current	300±30A/1.25±0.1s
2nd Discharge Over-Current	620±60A/80±20ms
BMS High Temperature Cut-Off	Charge 60°C±5°C Discharge 65°C±5°C
BMS Low Temperature Cut-Off	Charge 0°C±5°C Discharge -20°C±5°C
High Temperature Recovery	Charge 55°C±5°C Discharge 60°C±5°C
Low Temperature Recovery	Charge 5°C±5°C Discharge -15°C±5°C

DISCHARGE PERFORMANCE


Recommended Discharge Current	50A
Max. Continuous Discharge Current	100A
Discharge Cut-Off Voltage	10V

TEMPERATURE PERFORMANCE


Charge Temperature	32°F~131°F/0°C~55°C
Discharge Temperature	-4°F~140°F/-20°C~60°C
Recommended Storage Temperature	32°F~113°F/0°C~45°C




Different Rate Discharge Curve (25°C)

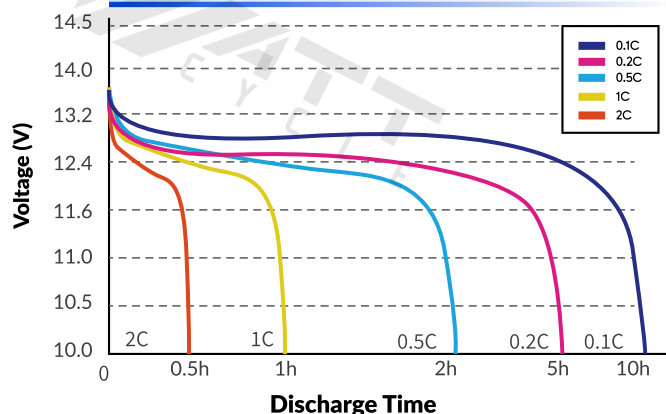


Different Temperature Discharge Curve at 0.5C

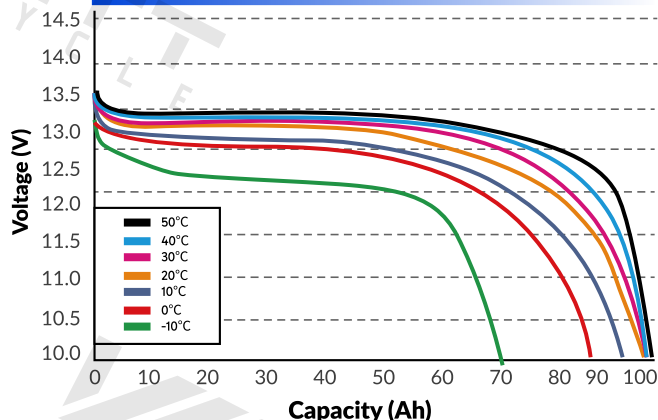


State of Charge Curve at 0.5C (25°C)

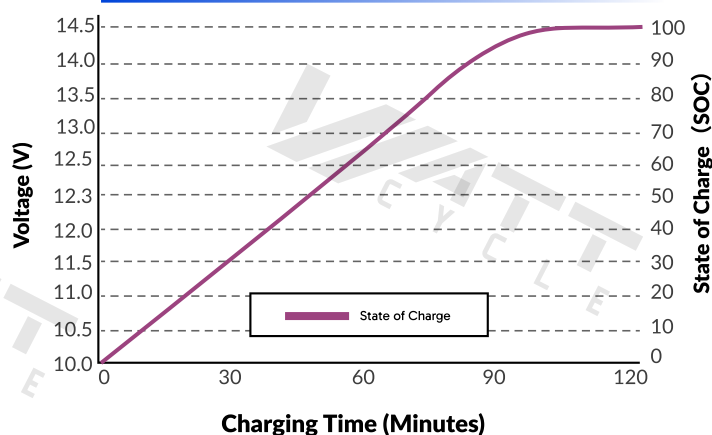


Charging Characteristics at 0.5C (25°C)

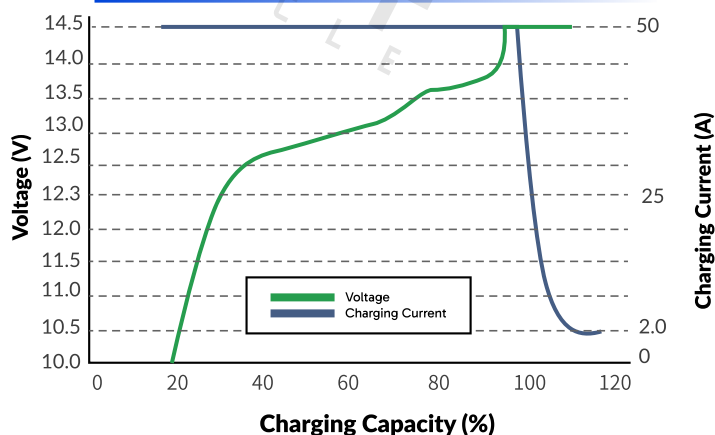

Cycle Life Curve at 1C According to DOD

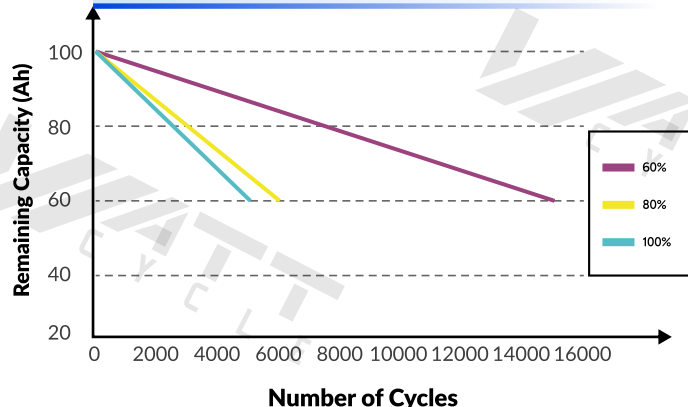

Self Discharge Characteristics Curve

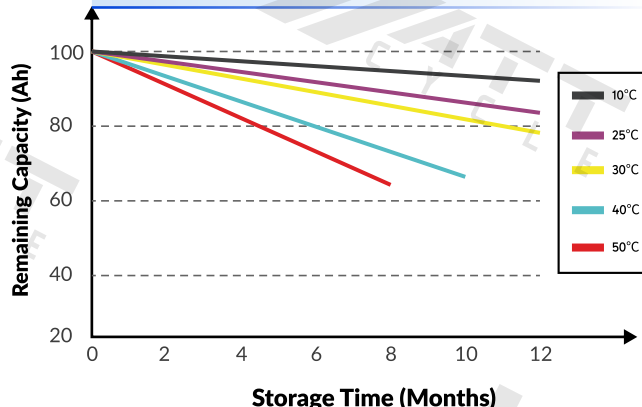

Warnings: The battery should be stored at an ambient temperature of 0°C to 55°C and should be charged to 30% to 50%. If stored for a long time, it is recommended to charge it every six months to prevent the battery from over-discharging. Please use a lithium iron phosphate charger when charging. Don't fix the positive and negative poles of the battery reversely. Don't disassemble the battery. Don't pierce the battery with pins or other sharp objects. Don't knock, throw or step on batteries, and don't immerse batteries in water. Don't throw the battery in fire or heat it.

