



Self-Heating




Smart Edition




Height 190



6000+ Cycles Life



RVs, Home Storage, Solar System,
Emergency Backup Power Supply

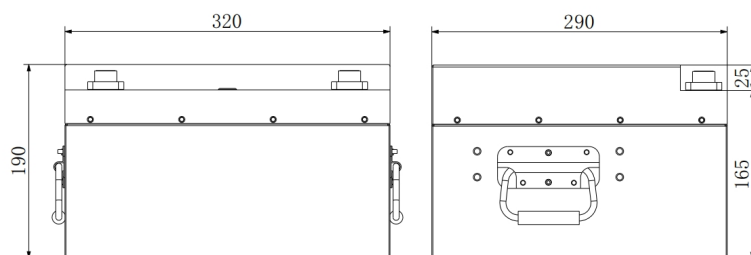

Length : 320mm/12.60 inch

Height : 190mm/7.48 inch

Width : 290mm/11.42 inch

Weight : 30.75kg±3%/67.79lb±3%

ELECTRICAL PERFORMANCE

Nominal Voltage	12.8V
Nominal Capacity	314Ah
Energy	4019Wh
Months Self Discharge	≤3%/Month
Cycle Life	6000@DOD80%

CHARGE PERFORMANCE

Charge Mode	CC/CV
Charge Voltage	14.4±0.2V
Recommended Charge Current	62.8A
Max. Continuous Charge Current	250A
Charge Cut-Off Voltage	14.6±0.12V

MECHANICAL PERFORMANCE

Shell Type	Metal
Size	320 x 290 x 190mm/ 12.60 x 11.42 x 7.48 inch
Weight	30.75±0.5kg/67.79±1.10 lb
Ingress Protection Rating	IP21
Terminal	M8

BMS SPECIFICATION

Overall Over-Charge Detection Voltage	14.6±0.12V
Overall Over-Discharge Detection Voltage	10±0.4V
1st Discharge Over-Current	260±40A/10±2s
2nd Discharge Over-Current	333±100A/1~2s
BMS High Temperature Cut-Off	Charge 55°C±5°C Discharge 60°C±5°C
BMS Low Temperature Cut-Off	Charge 0°C±5°C Discharge -20°C±5°C
High Temperature Recovery	Charge 50°C±5°C Discharge 55°C±5°C
Low Temperature Recovery	Charge 2°C±5°C Discharge -15°C±5°C

DISCHARGE PERFORMANCE

Recommended Discharge Current	157A
Max. Continuous Discharge Current	250A
Discharge Cut-Off Voltage	10±0.4V


TEMPERATURE PERFORMANCE

Charge Temperature	32°F~131°F/0°C~55°C
Discharge Temperature	-4°F~149°F/-20°C~65°C
Recommended Storage Temperature	50°F~86°F/10°C~30°C
Heating Module Activation Condition (During Charging)	<23°F/<-5°C
Heating Module Deactivation Condition (During Charging)	>50°F/>10°C







Different Rate Discharge Curve (25°C)

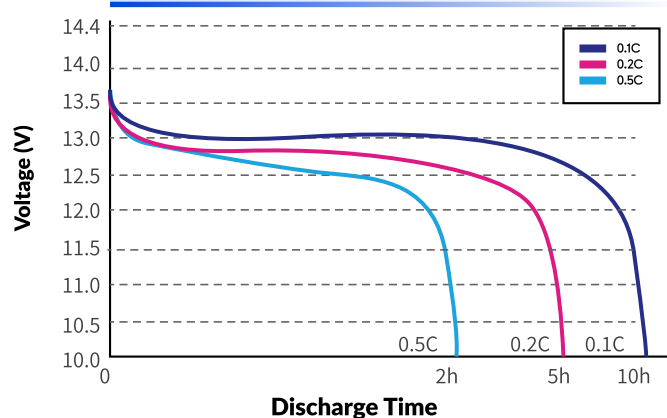


Different Temperature Discharge Curve at 0.5C

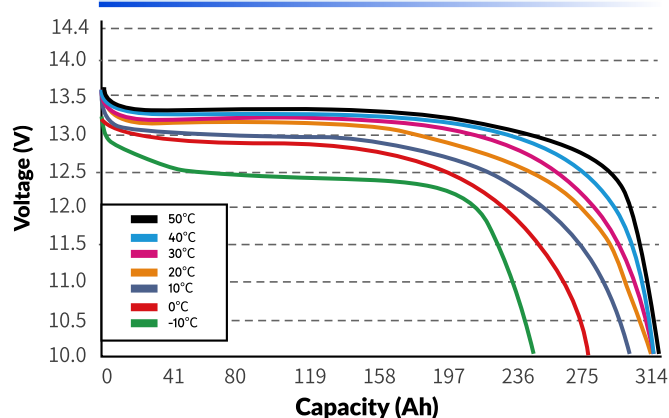


State of Charge Curve at 0.5C (25°C)

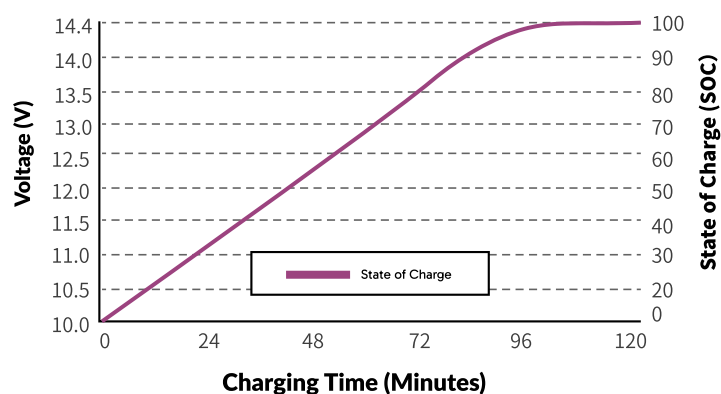


Charging Characteristics at 0.5C (25°C)

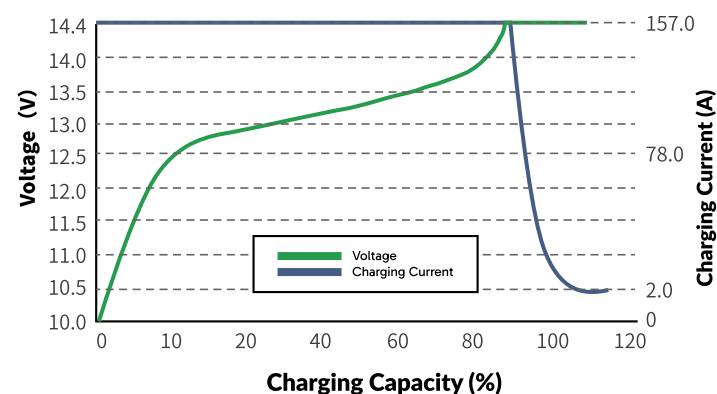

Cycle Life Curve at 1C According to DOD

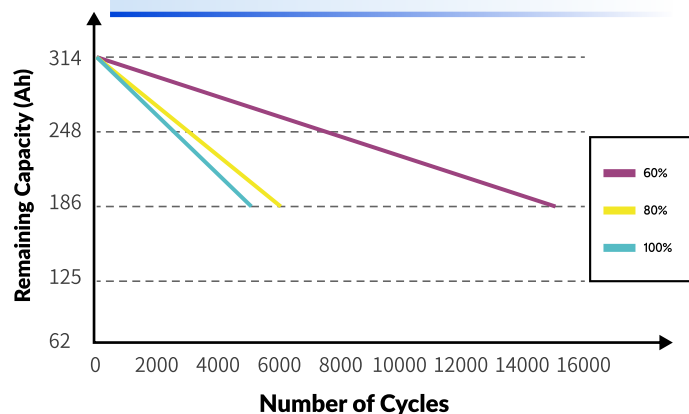

Self Discharge Characteristics Curve

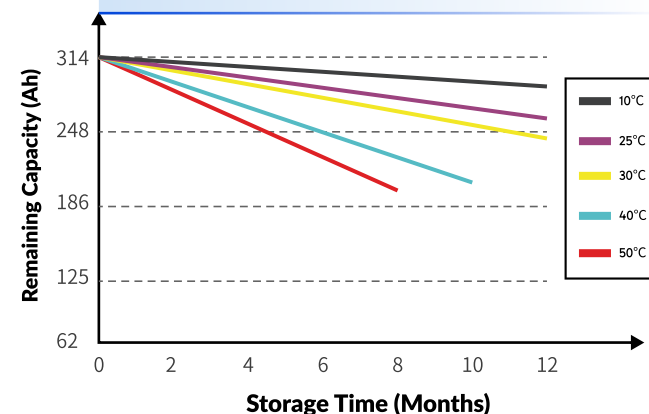

Warnings: The battery should be stored at an ambient temperature of 0°C to 55°C and should be charged to 30% to 50%. If stored for a long time, it is recommended to charge it every six months to prevent the battery from over-discharging. Please use a lithium iron phosphate charger when charging. Don't fix the positive and negative poles of the battery reversely. Don't disassemble the battery. Don't pierce the battery with pins or other sharp objects. Don't knock, throw or step on batteries, and don't immerse batteries in water. Don't throw the battery in fire or heat it.

